



# TAOGLAS®



# Datasheet

## CAB.011

### Description:

Taoglas Cable Assembly  
IPEX MHFI to SMA(F) Bulkhead Straight Connector  
with 95mm  $\varnothing$ 1.13 cable

### Features:

High Performance Cable Assembly  
Rated to 5 watt max. up to 6GHz  
VSWR 1.3 max.  
95mm of 1.13 Coaxial Cable  
RoHS & Reach Compliant

1. Introduction	3
2. Cable Insertion Loss	4
3. RG-174 Cable Specification	5
4. Mechanical Drawing	7
<hr/>	
Changelog	8

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



# 1. Introduction




Taoglas Cable & Connector Division manufacture customized or pre-configured cable assemblies in a wide range of lengths, cable types, and connector types. Cables are available with all commercially available RF connector series.

For total flexibility, our industry-first online cable builder allows you to customize and order cable assemblies exactly the way you require them. Using the intuitive interface, build your cable assembly in real time, as you want it, and after you have completed your purchase, your goods will be manufactured according to the lead time specified and then shipped immediately to your address.

Visit <https://www.taoglas.com/cable-builder/> to kick start your next project today.


For high quantity pricing, subject to MOQ, or more information, contact your regional Taoglas Customer Support team.

## 2. Cable Insertion Loss

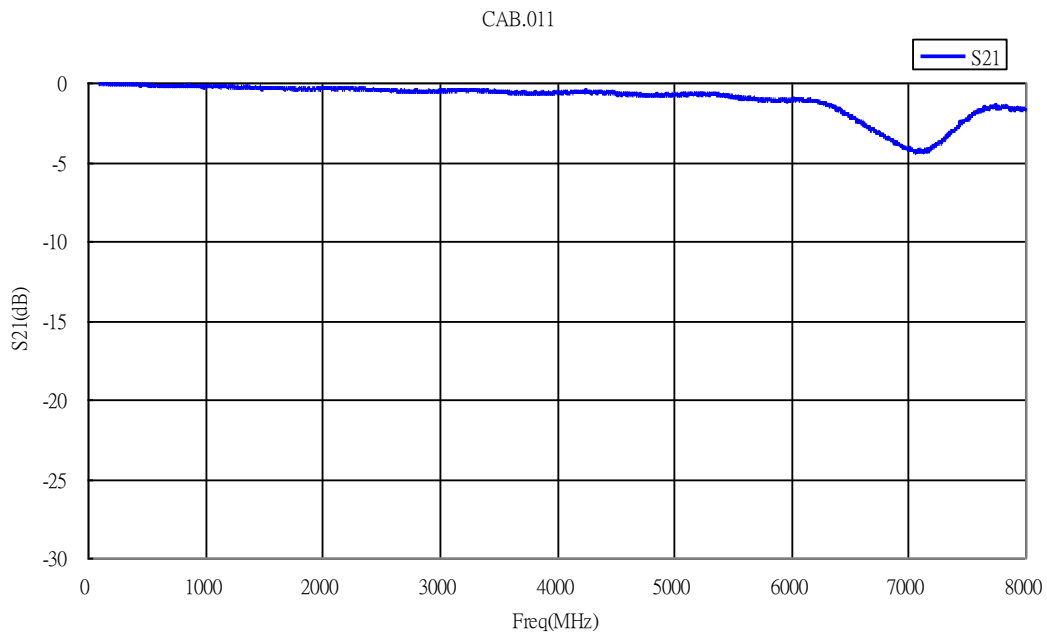


### 3. RG-174 Cable Specification

#### 2.1 Drawing – Cross Section

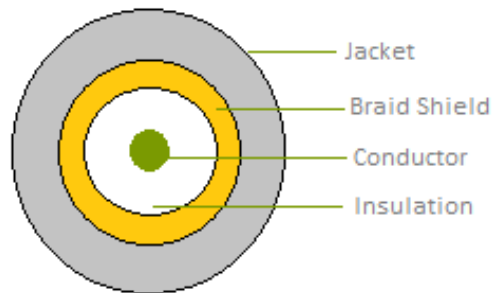


#### 2.2 Structure and Dimensions

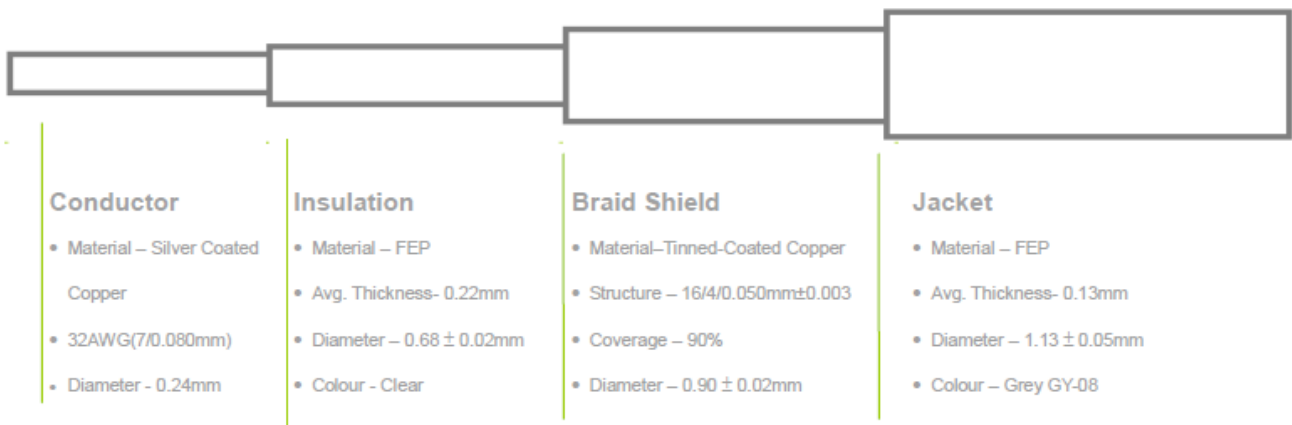

## 2.3 Electrical & Physical Specification

1	Item:	32 AWG
2	Rating Temp Voltage:	105°C 30V UL 1979
3	Insulation Resistance:	1000 MEGA OHM-KM Min.
4	Conductor Resistance:	545 OHM/KM/20°C Max.
5	Dielectric Strength:	AC 1.0 KV/minute
6	Spark test:	2.5 KV
7	Insulation Unaged Tensile Strength	2500 PSI Min.(1.76Kg/mm <sup>2</sup> )
	Elongation	200% min.
	Aged Tensile Strength	Unaged Min 75%(168HRS*232°C)
	Elongation	Unaged Min 75%(168HRS*232°C)
8	Jacket Unaged Tensile Strength	2500 PSI Min.(1.76Kg/mm <sup>2</sup> )
	Elongation	200% min.
	Aged Tensile Strength	Unaged Min 75%(168HRS*232°C)
	Elongation	Unaged Min 75%(168HRS*232°C)
9	Nom. Impedance	50 ± 3 Ohms
10	Nom. Capacitance	96 ± 3 pF/m
11	Nom. Vel. Of Prop.	69%
12	VSWR (0-6GHz)	Max 1.3
13	Flame Test	VW-1 OK
14	Attenuation (dB/1M)	2.0GHz 2.80

# 4. Mechanical Drawing

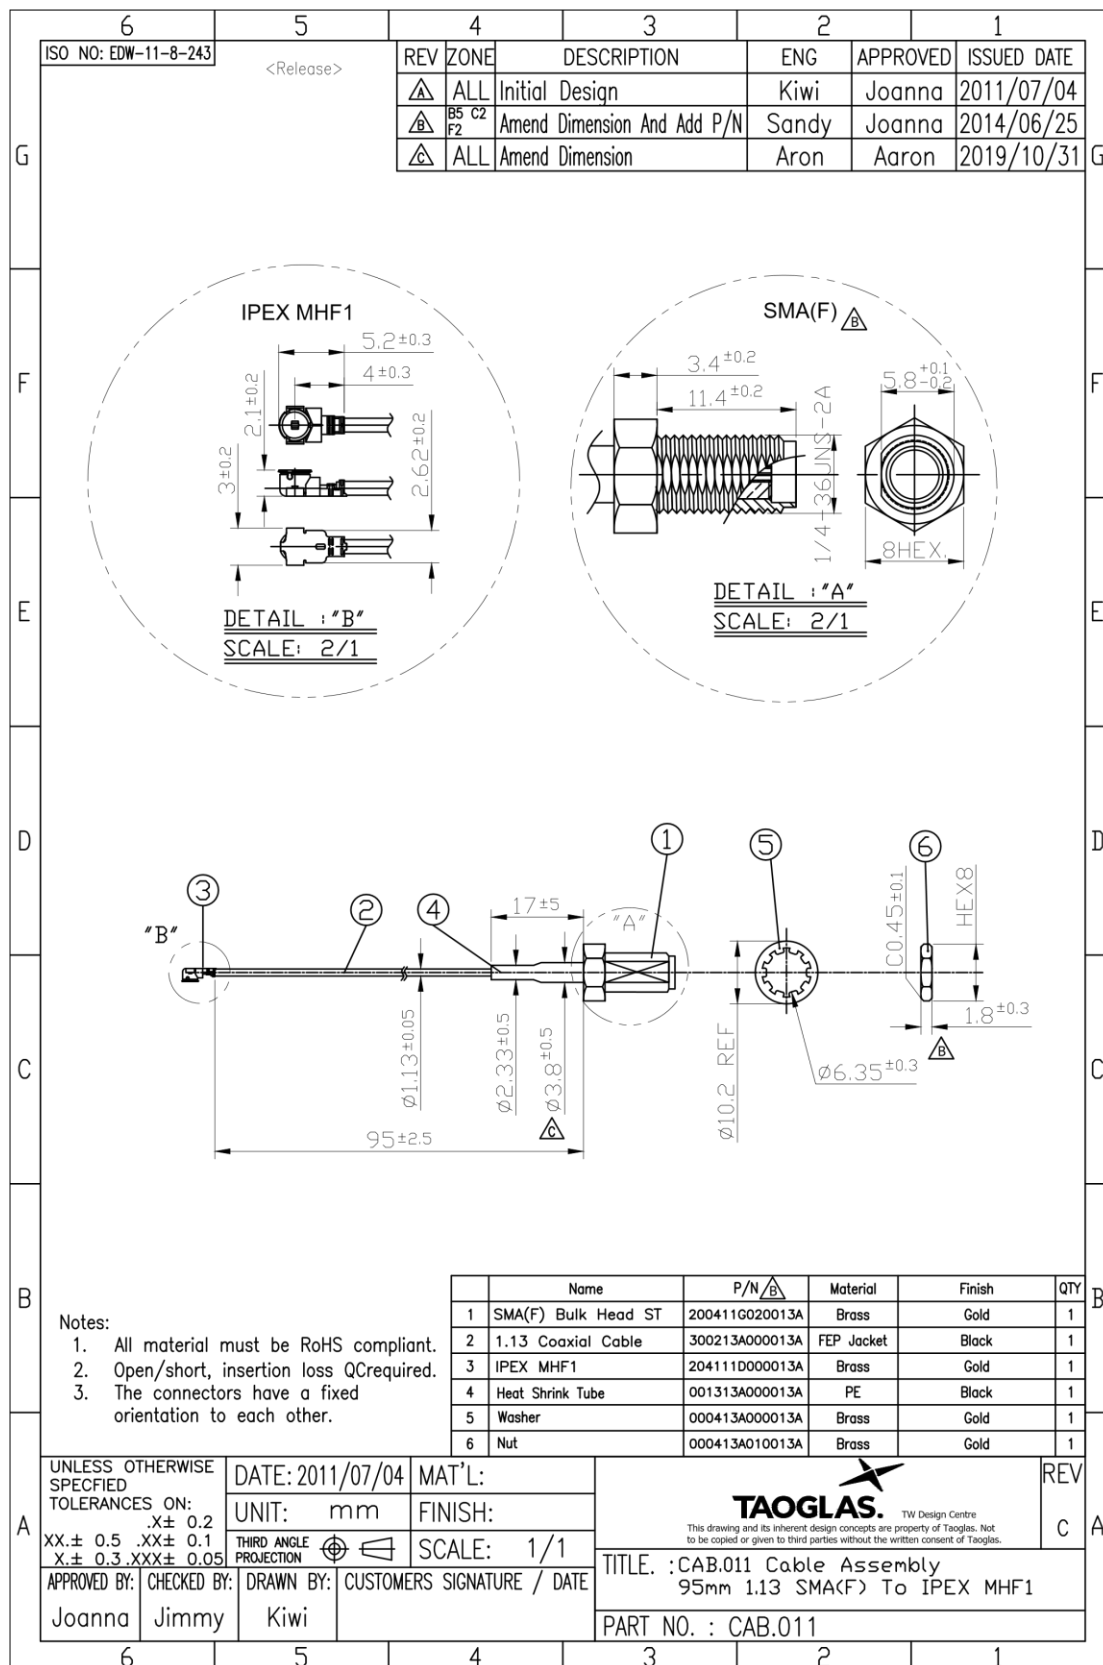

Changelog for the datasheet

**SPE-11-8-068– CAB.011**

**Revision: B (Current Version)**

Date:	2022-06-17
Changes:	Updated the drawing
Changes Made by:	Cesar Sousa

**Previous Revisions**

**Revision: A (Original First Release)**

Date:	2020-05-27
Notes:	
Author:	David Connolly





[www.taoglas.com](http://www.taoglas.com)